
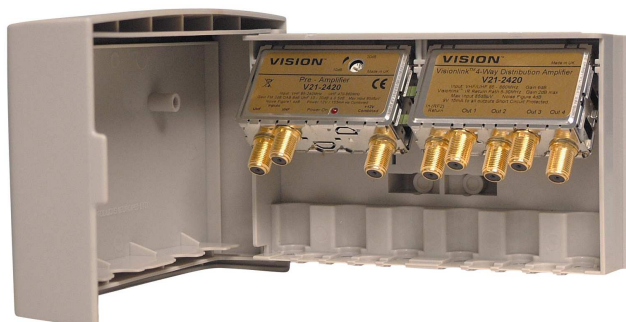


XDA External Distribution Amplifiers

- **V21-1406 XDA4 1 x 4-way**
- **V21-2420 XDA4+ 2 x 4-way with pre-amplifier**
- External or internal distribution of TV signals and BSkyB programmes
- Digital or analogue compatible
- Remote link back to BSkyB receiver
- Powers Vision-link™ "remote eyes" & other compatible remote "eyes"
- High output and low noise performance
- Suitable for mast, wall or bulkhead mounting outdoor IP53 rated
- Suitable for outdoor installation avoids damage to internal decoration
- Gold F-Connectors for superior connectivity

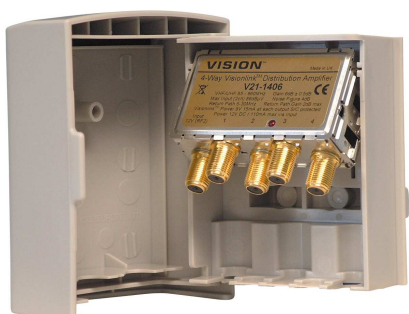

Model	V21-1406	V21-2420
Dist Amplifier Input Freq	85-862MHz	85-862 MHz
Pre-amplifier Input Freq	-	85-240, 470-862MHz
No of distribution outputs	4	4
Dist Amplifier Gain	2 to 4dB (VHF), 6dB (UHF)	2 to 4dB (VHF), 6dB (UHF)
Pre-amplifier Gain	-	2 to 8dB (VHF), 10 to 20dB (UHF)
Dist Amplifier Max Input	85dB μ V	85dB μ V
Pre-amplifier Max Input	-	80dB μ V
Dist Amplifier Noise Figure	4dB	4dB
Pre-amplifier Noise Figure	-	1.4dB
Power consumption	12V 110mA	12V 155mA
Power Supply	Supplied with V23-2350, 180~240V AC 50Hz SMPS	
Output Voltage/Current	12V 350mA	12V 350mA
Plated Connector	F-female	F-female

In the interests of continued product development & improvement, Vision Products (Europe) Ltd reserves the right to change product specifications, design & dimensions. Data correct at time of going to press.08/06/2010